




Surface: Door leaf and frame galvanized and primed with one component primer similar RAL 7001.

Mounting: Delivery and professional assembly including filling of the cavities in the frame with mortar of group III.

Special Models

Standard Glazing: Glazing held by profiled and visibly screwed steel glazing bars. Minimum frieze width 125 mm side and top, base 340 mm.

Pedestrian door: Double walled, level 75 mm thick steel door leaf, four-sided folded with thick rebate and adjustable fixed sealing profile in fold. With bottom stop. Special insulating inserts completely laid in and glued. Mortice lock with latch lever function in accordance with DIN EN 12209 (prepared for installation of a profile cylinder lock provided by customer). Door handle set in accordance with DIN EN 1906 firmly installed turnable aluminium F1 in U-shape with rounded short-plate.

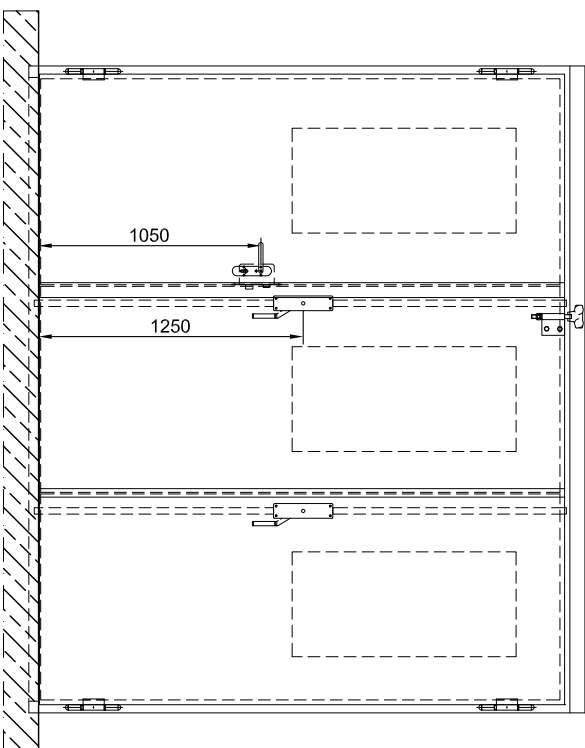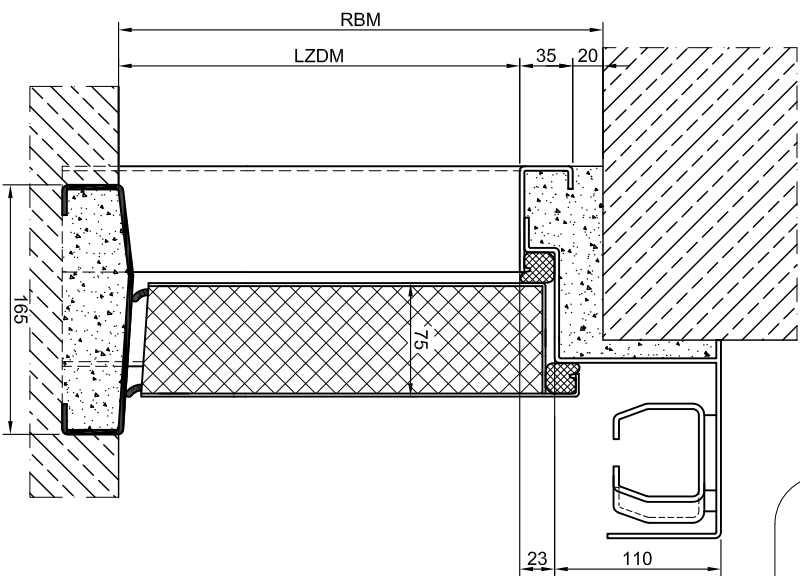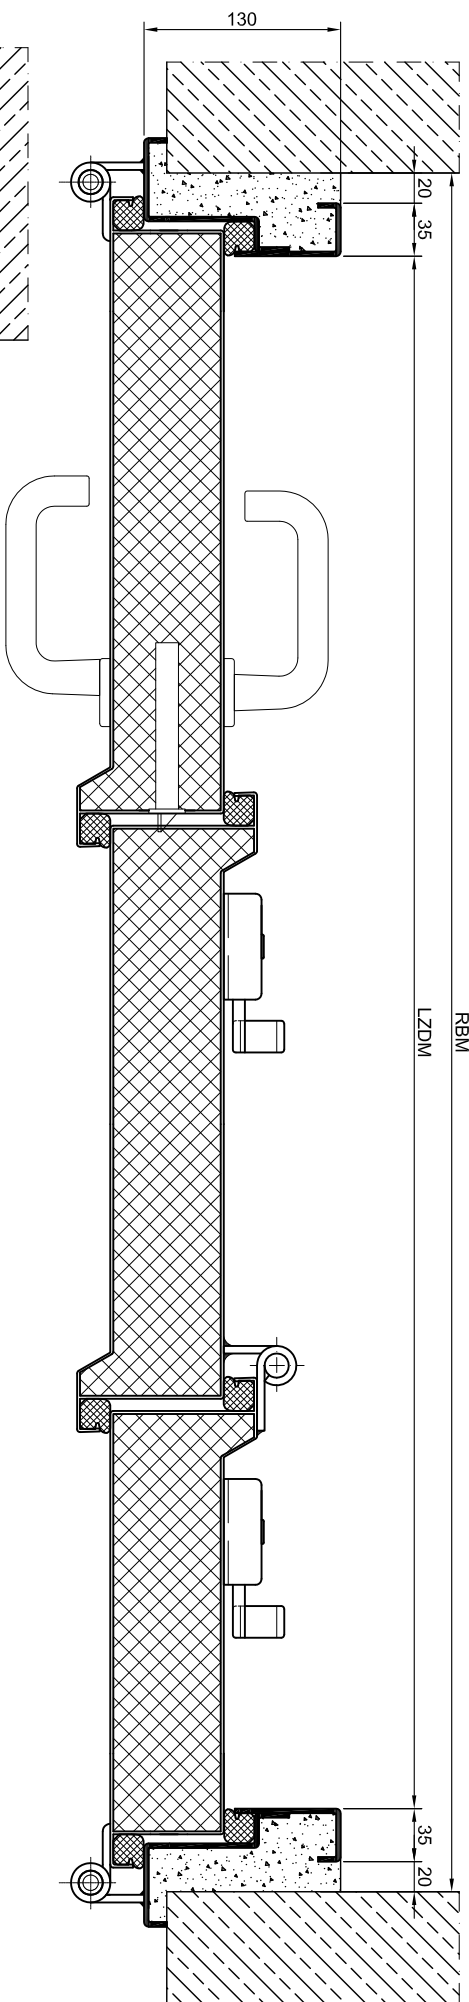

Wing partition

3-wing folding door
2 : 1

4-wing folding door
3 : 1

5-wing folding door
3 : 2

6-wing folding door
3 : 3