

Burglar Proof RC 2 Ventilation Grille**Burglar Proof****RC 2****in accordance with DIN 18106***** Stainless Steel****Range of Dimensions:****Field width**

max. 1500 mm without vertical strut

max. 3000 mm with vertical strut

Field height

up to 1500 mm unlimited

over 1500 mm up to max. 2500 mm

Note:

Single panels can be connected with rectangular tubes

(* special options)

Technical specification and text for invitation to tender**Product:**LÜG SEC / RC2 burglar proof ventilation grille brand Buchele
In accordance with DIN 18106**Grille Type:**

LÜG SEC / RC2

Burglar Proof:

RC 2

Dimensions:

.... x mm

Filling:Firmly installed, diagonal, rain rejecting double segments
of aluminium.

Segments are overlapping this creates sight and poke protection.

The inside is fully covered by bird protection bars.

Bar distance 10x10 mm.

Frame:

Non turning angle frame circumferential on 4 sides.

Surface:Frame galvanized and primed with one component primer similar RAL
7001 segments aluminium not stained.**Mounting:**

Delivery and professional assembly.

Special Options**Stainless Steel:**

Stainless steel - material 1.4301 (V2A) res. 1.4571 (V4A).

Surface raw, brushed or rotary matte finished



(segments not in aluminium but steel)

Varnished:

All parts varnished in RAL



↑
attack side

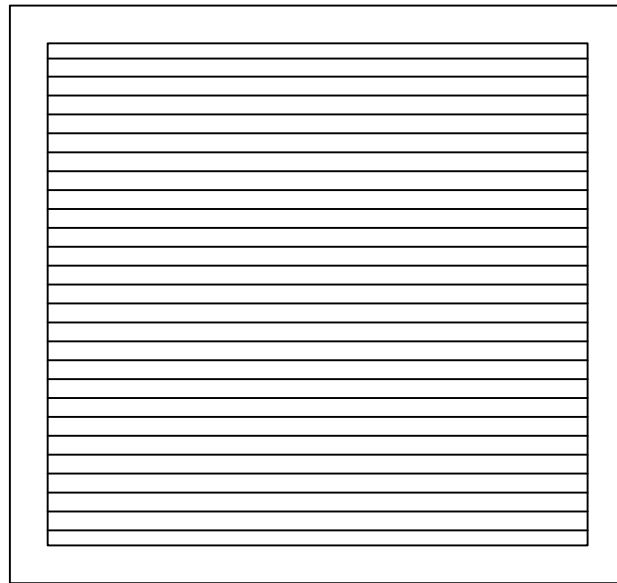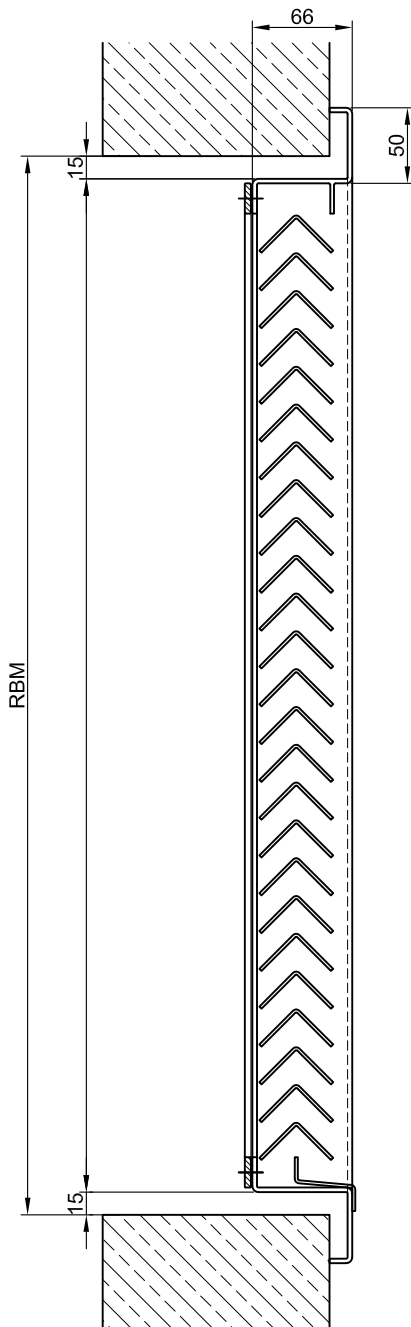

free ventilation shaft 50 % (higher values on demand)