BUCHELE
TÜREN + TORE

The Art of Doors

SEC 2- R-ST / FB 7

Double Wing FB 7 Bullet Proof Safety Door with solid glazed Side Parts in Tubular Frame Construction

Bullet Proof **FB 7 NS** **in accordance with DIN EN 1522**

Range of Dimensions:	**Width from 1375 mm to 3000 mm** **Height from 1750 mm to 3000 mm**
Range of Dimensions side parts:	**Width from 500 mm to 1500 mm** **Height from 1750 mm to 3000 mm**

Technical specification and text for invitation to tender

Product:	**SEC-2 double wing bullet proof steel door with solid glazed side parts brand Buchele in accordance with DIN EN 1522**
Door Type:	**SEC 2-R-ST / FB 7 NS**
Bullet Proof:	**FB 7 NS**
Dimensions:	**…. x …. mm**
Door leaf:	116 mm thick 3-sided folded finish, frieze width 3 sides 105 mm on side of lock 155 mm glazing in BR 7 safety glass with visible screwed on glass supporting frame.
Frame door:	3-sided block frame with rubber seal in fold. stopper sill surface galvanized.
Frame side parts:	**3-s**ided block frame on side of door frame with BR 7 safety glass with visible screwed on glass supporting frame
Hinges:	Threepart height-adjustable construction hinges with hinge pin retention and ball-bearing spacer ring for smooth door movement.
Fitting:	**Active door leaf** with 2-point safety locking system with latch lever function in accordance with DIN EN 12209 (prepared for installation of a profile cylinder lock provided by customer). Safety door handle set with DIN EN 18257 firmly installed turnable aluminium F1 in U-shape with rounded protective plate. **Inactive door leaf** with espagnolette bolt lock in the central rebate profile.
Surface:	Door leaf and frame galvanized and primed with one component primer similar RAL 7001.
Mounting:	Delivery and professional assembly including filling of the cavities in the frame with mortar of group III.

Special Models

Emergency Door:	With panic fitting in accordance with DIN EN 179 and 1125
Burglar Proof:	RC 2,RC 3,RC4.
Sound Insulation:	Up to $R_{w,p}$ 51 dB with stop sill.
Stainless Steel:	Material 1.4301 (V2A) or. 1.4571 (V4A), Surface bright mill or brushed

technische Änderungen vorbehalten – Stand 01/17

Buchele GmbH • Industriestraße 3 • D-73061 Ebersbach/Fils • Tel. +49 7163 1001 0 • Fax +49 7163 1001 44

BUCHELE
TÜREN + TORE

The Art of Doors

SEC 2- R-ST / FB7

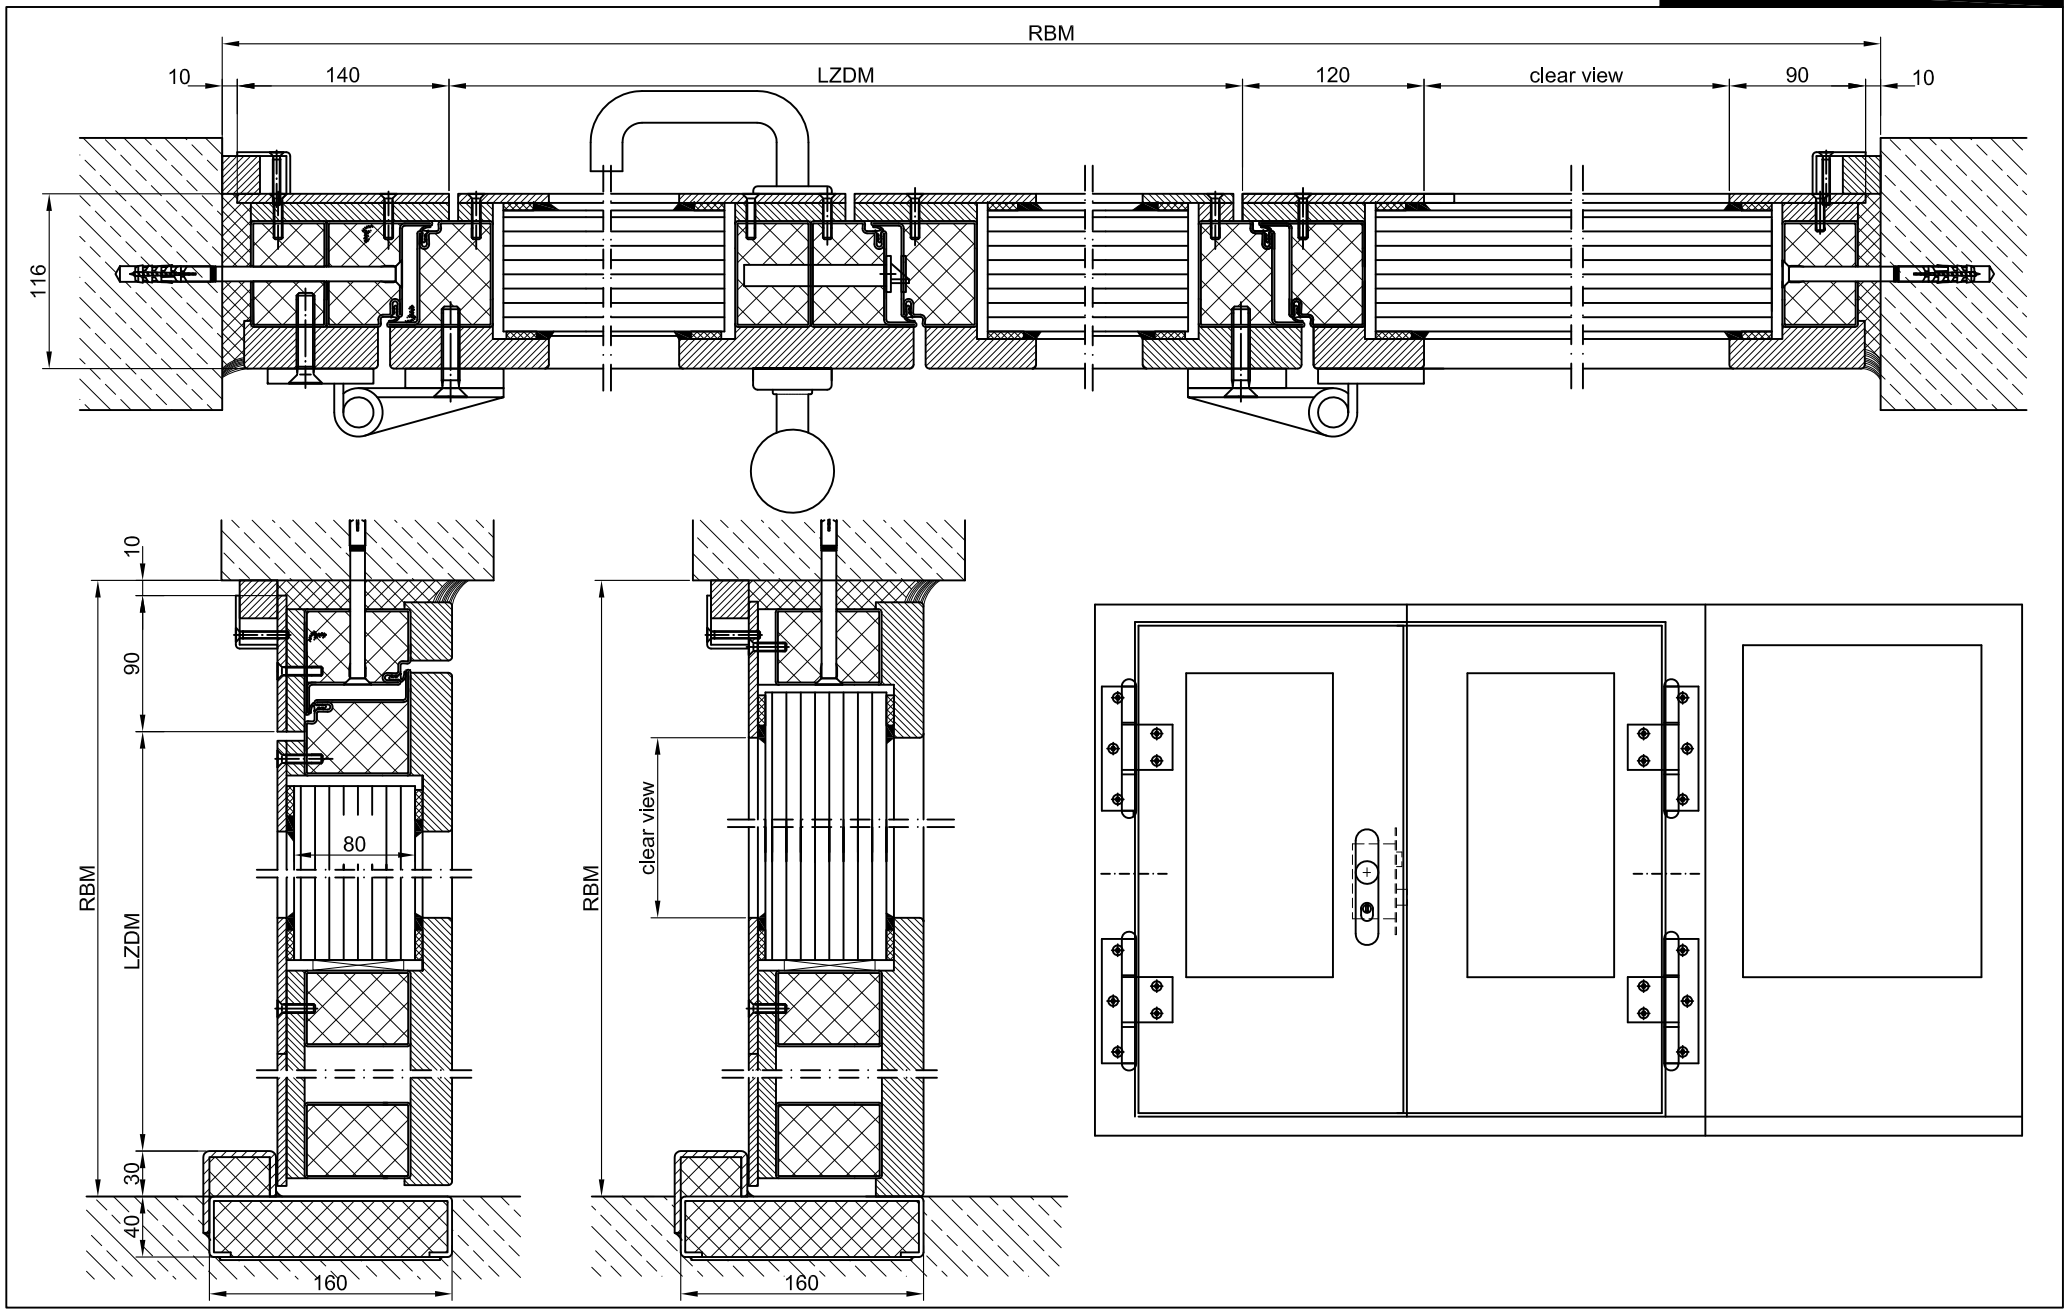

technische Änderungen vorbehalten - Stand 01/17

Buchele GmbH • Industriestraße 3 • D-73061 Ebersbach/Fils • Tel. +49 7163 1001 0 • Fax +49 7163 1001 44