



HF 50

Solid Glazed Flood Protection Window

Water Tight up to 1,5 m WS (water column) (Waterside is on side of hinges)

* Stainless steel

Range of Dimensions:	Width from	500 mm to 1200 mm
	Height from	500 mm to 2250 mm


(* special options)

Technical specification and text for invitation to tender

Product:	HF 50 solid glazed flood protection window brand Buchele
Window Type:	HF 50
Water tight:	up to 1,5 m WS (waterside is on side of hinges)
Dimensions:	x Mm
Frame:	4-sided thermally insulated block frame 87 mm thick, with 4-sided seal in fold on the outside circumferential foaming agent
Window casement:	4-sided thermally insulated hollow sections with glass mounting nose on one side and one side glass mounting frame 4 –sided visibly screwed to the basic profile.
Glazing:	Pressure resistant safety glazing installed in sealing bed
Surface:	Frame and glass beads galvanized and primed with one component primer similar RAL 7001
Mounting:	Delivery and professional assembly.
	Special Options
Stainless steel:	Material 1.4301 (V2A) res. 1.4571 (V4A), Surface raw, brushed and rotary matte finished.
Surface:	Powder coated in RAL



HF 50

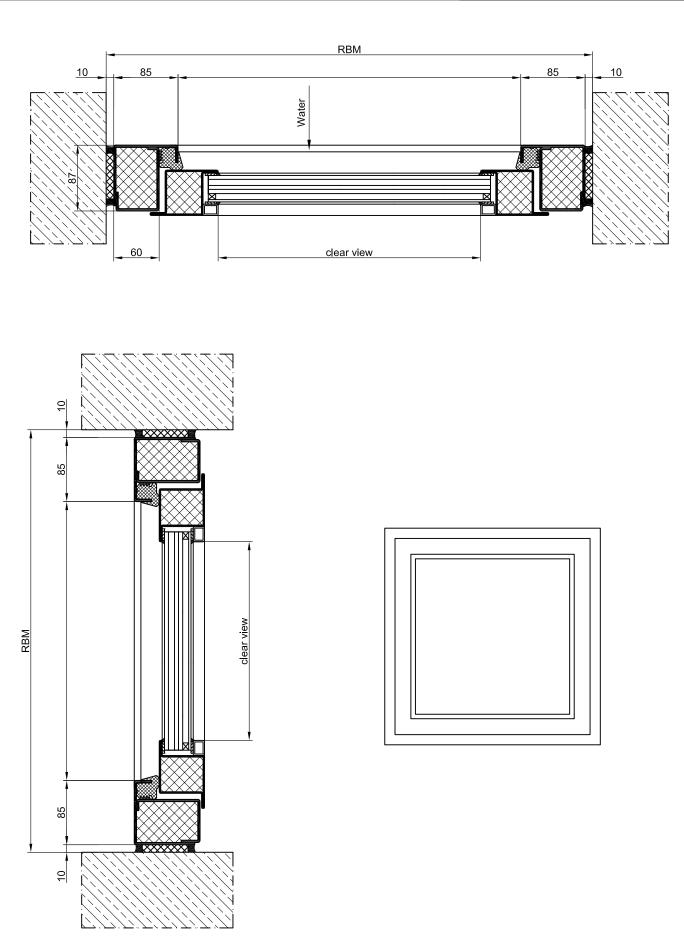

The Art of Doors